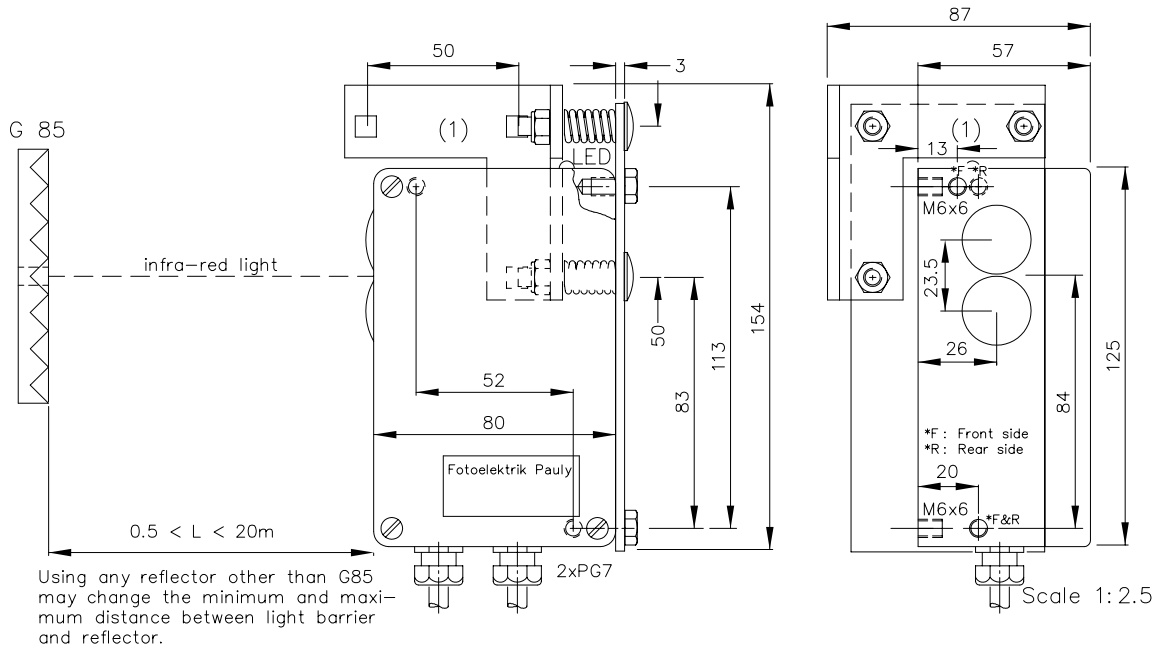



Infra-red light Reflex Optic Head Type YvR26/2*03

for self-checking control device PP2028ST

0.5 - 20m

Infra-red light
Reflex Optic Head
for
self-checking
control device

YvR26/2*03


Order no.:

3331M03

Technical Characteristics of the minimum version:

Housing	Al-cast
Weight	approx. 600g
Protection mode	IP65
Connection	terminal block up to 2x40m 3-wire shielded cable, heat resistant if necessary by control unit
Supply	
Transmitter light	LED 880nm, invisible, ir
Light beam diameter	approx. 360mm/20m
Steady light resist.	>80kLx
Switch indicator	LED yellow
Ambient temperatur	-25...+100°C

Connections:

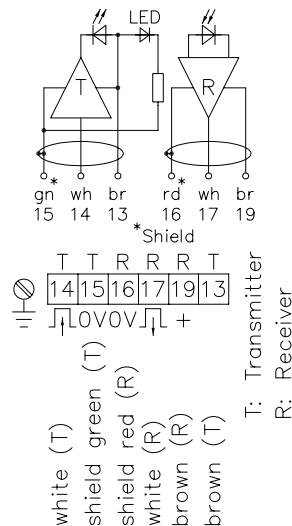

Accessories:

- Control unit PP2028ST, required for operation
- Shielded 3-core control cable
- Reflector
- Adjustment flange JF26H (1)
- Heavy adjustment flange R26SH
- Elbow tube adjustment AD26SS1 or AD26SS2
- Cooling water flange KW26
- Dust protection tube TUB75 with adapter
- Diaphragms, Special filters

Options:

- If using dust protection tube: adapter required
- If using cooling water flange, then milled wall, y

3331 DE M03 24.06.05 tb
E-3331 1 3
(17.12.03 gs)
(18.02.05 ml)