
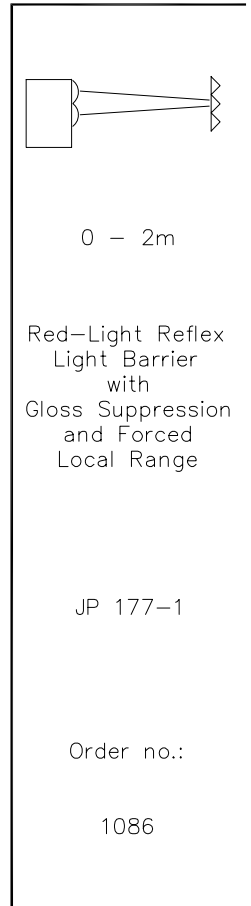


Red-Light Reflex Light Barrier with Gloss Suppression and Forced Local Range Type JP177-1

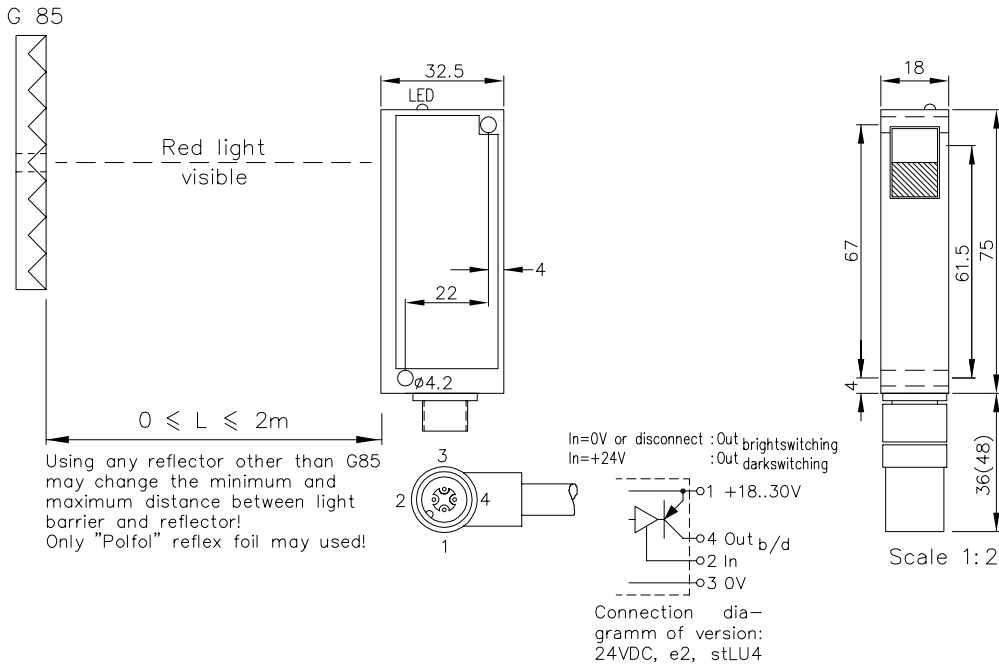

Technical characteristics:

Housing	Al-Cast
Weight	approx. 100g
Protection mode	IP65
Connection	4 pin plug stLU4
Supply	24VDC/40mA without load
Output	npn 60mA s.c.-prot., e2
Signal mode	bright-/darkswitching, selectable
Transmitter light	LED 650nm
Steady light resistance	~5kLx
Interference suppress.	Force synchronization
Light beam diameter	approx. 80mm/5m
Access time	~0.5ms/Switch transition
Switching rate	>500/s typ.: 1000/s
Switch indicator	LED
Ambient temperatur	-25...+60°C

Features:

Connection	5+1 pin Plug stHI61 5+1 pin Plug stHI62 5 wire No.-Cable K5 (IP67)
Supply	12VDC
Output	npn 60mA s.c.-prot., e3 Optocoupler 60V/50mA, e1 antivalent npn, e4 or npn, e5

Accessories (optional):

- Reflectors
- Elbow tube adjustment JR17

1087 DE
E_1086_1
(10.01.03 gs)
18.02.05 mj